

NEW!


DSV Decking Screw



The DSV screw is a powerful fastening solution for preservative-treated decking applications. With its underhead nibs and fast-start tip, the DSV is ideally suited to be driven and countersunk into today's wood deck boards. The heavy #10 shank diameter is designed to withstand the expansion and contraction that is common with fast-growth lumber. Available in hand-drive and in collated strips for use in our Quik Drive® auto-feed screw driving system, DSV screws are offered in a variety of sizes to fasten both decking, fascia and trim.

FEATURES:

- Special upper thread design increases deck board pulldown
- Fast-start hi-lo tip easily pierces preservative-treated and other common deck boards
- Rimmed flat-head with nibs countersinks easily
- Quik Guard® coating provides corrosion resistance for exterior and certain preservative-treated wood applications
- Recommended for use with the Quik Drive PRO300S auto-feed screwdriving system (with decking clip)
- Driver bit included in each box

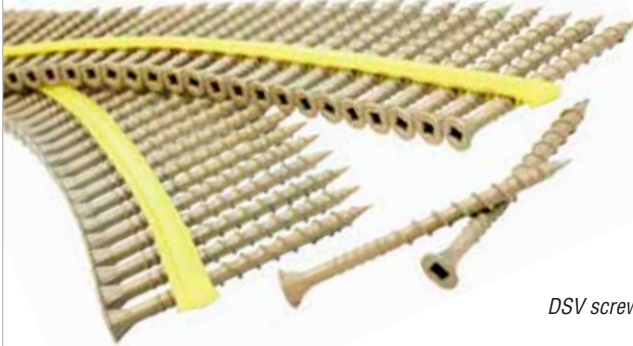

DSV screw available in tan



Hand-Drive

Size	Length (in.)	350 ct. Model No.	1750 ct. Model No.
#10	2	DSVT2R350	DSVT2MB
#10	2½	DSVT212R350	DSVT212MB
#10	3	DSVT3R350	DSVT3MB



1. #3 square head (replacement driver bit - SSBIT3U-2)

Quik Drive® Collated

Size	Length (in.)	500 ct. Model No.	750 ct. Model No.	1000 ct. Model No.	1500 ct. Model No.	PRO 300S	PRO 250	PRO 200S
#10	2	•	HCKDSVT2S	•	DSVT2S	√	√	√
#10	2½	HCKDSVT212S	•	DSVT212S	•	√	√	•
#10	3	HCKDSVT3S	•	DSVT3S	•	√	•	•

1. #3 square head (replacement driver bit - BIT3SU)

This flier is effective until June 30, 2014, and reflects information available as of April 1, 2012. This information is updated periodically and should not be relied upon after June 30, 2014; contact Simpson Strong-Tie for current information and limited warranty or see www.strongtie.com.