



GuardDog[®]

EXTERIOR WOOD SCREW

Fully tested, fully guaranteed in ACQ, Cedar, Redwood and Copper Azole.

- Versatile head style can be used with the PoziSquare Drive™, #2 square drive and Phillips drive
- Guaranteed corrosion resistance
- Color matched to blend in with pressure treated decking
- Sharp threads quickly penetrate lumber
- Free PoziSquare bit included

Photograph should not be used as a reference for fastening patterns.



**For more information or free samples,
call FastenMaster at 800-518-3569.**

GuardDog®

EXTERIOR WOOD SCREW

INSTALLATION PROCEDURE

Use a 0-1800 RPM variable speed drill (at least 14.4V if cordless). Use the PoziSquare driver bits provided. Install fastener perpendicular to deck, increasing drill speed as the screw threads into the deck. Slightly countersink. Do not overdrive. If cam-out occurs, remove and replace screw.

No Predrilling

GuardDog's sharp piercing point allows for installation without predrilling for most applications. Predrilling is recommended at all seam joints, when fastening within 1½" of end of board, and when using hardwoods.

GuardDog PoziSquare Drive – Versatility on the job

The patented PoziSquare Bit is engineered to work with:

- The PoziSquare Drive (Recommended drive system—Free bit enclosed)
- #2 Square Drive
- #2 Phillips Drive

This versatile drive system allows for flexibility at the jobsite. The PoziSquare drive virtually eliminates cam-out during installation. (If cam-out does occur during installation, the fastener should be removed and replaced with a new GuardDog screw.)

GuardDog Coating: Fully Tested, Fully Guaranteed.

The GuardDog coating has been tested and approved for use in ACQ, Copper Azole PT, Cedar, and Redwood applications. This fastener is guaranteed to protect against rust for the life of the project.

Note: Corrosion guarantee does not apply when the fastener is used within 1,000 ft. of a saltwater or when de-icing salts will be in contact with decking.


For technical assistance or questions regarding proper use of this fastener, please contact FastenMaster Technical Support at 800-518-3569 or visit www.FastenMaster.com.

| Item # | Screw Length | Qty. per Box | Sq. Ft. of Deck* |
|----------------|--|--------------|------------------|
| FMGD158-75 | 1½" | 75 | 20 |
| FMGD158-350 | 1½" | 350 | 100 |
| FMGD158-1750 | 1½" | 1750 | 500 |
| FMGD002-75 | 2" | 75 | 20 |
| FMGD002-350 | 2" | 350 | 100 |
| FMGD002-1750 | 2" | 1750 | 500 |
| FMGD212-75 | 2½" | 75 | 20 |
| FMGD212-350 | 2½" | 350 | 100 |
| FMGD212-1750 | 2½" | 1750 | 500 |
| FMGD003-75 | 3" | 75 | 20 |
| FMGD003-350 | 3" | 350 | 100 |
| FMGD003-1750 | 3" | 1750 | 500 |
| FMGD312-75 | 3½" | 75 | 20 |
| FMGD312-350 | 3½" | 350 | 100 |
| FMGD312-1350 | 3½" | 1350 | 350 |
| FMPOZ12BIT-2PK | Driver Bit for GuardDog w/ PoziSquare Drive (2 included) | | |

FMGDSHEET (0211)

*Based on a fastening pattern of 2 screws per joist, spaced every 16", into standard 6" wide decking

PRODUCT FEATURES

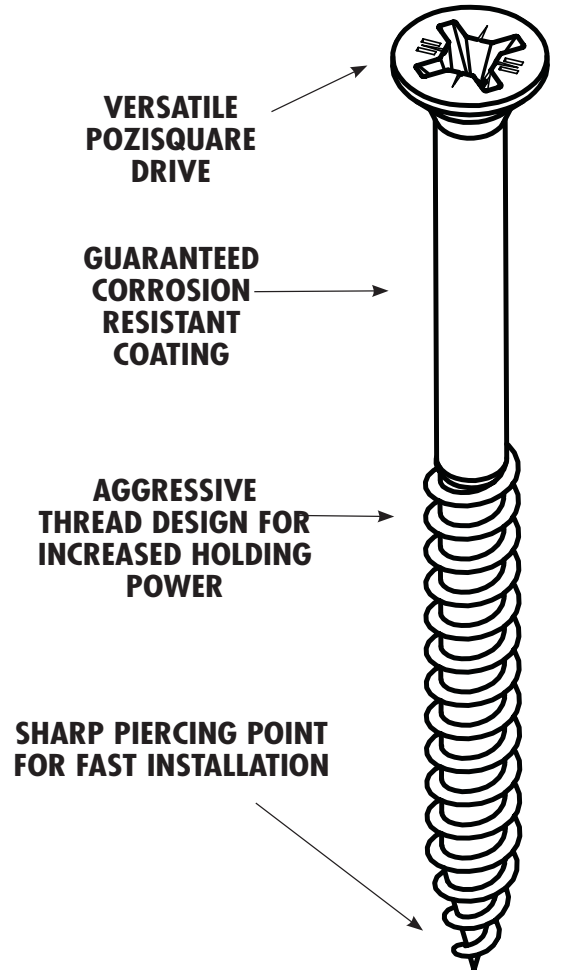

VERSATILE POZISQUARE DRIVE

GUARANTEED CORROSION RESISTANT COATING

AGGRESSIVE THREAD DESIGN FOR INCREASED HOLDING POWER

SHARP PIERCING POINT FOR FAST INSTALLATION